

PERFORMANCE

Primo SL AE – Active Enclosures



The Morel Primo SL AE amplified subwoofer systems deliver powerful, musical bass from a compact, vehicle-friendly enclosures. Available in 8-inch and 10-inch sizes, each model integrates a 350-watt amplifier precisely matched to a Primo SL subwoofer, ensuring exceptional control, efficiency, and sound quality. The remarkably compact, acoustically optimized enclosures reduce resonance and distortion for tight, impactful low-frequency performance with fast transient response at any volume.

Flexible high and low-level inputs enable seamless integration with OEM and aftermarket audio systems, while onboard crossover, phase, and bass boost controls allow precise tuning. An included remote level controller provides convenient bass level adjustment from the driver's seat. Tri-mode turn-on allows users to connect a wired remote turn on lead, or use the intelligent signal-sensing or DC offset turn-on features to simplify installation. Quick-disconnect power and audio input terminals allow easy removal of the Primo SL AE when extra cargo space is needed. Whether you select the Primo PSL8AE or PSL10AE, each delivers premium bass with everyday practicality and flexibility.

Key advantages

- Extremely compact enclosure designs
- Exceptionally rigid construction
- Classy yet durable carpeted finish with embroidered logo
- Systems optimized for full bandwidth response from 20-200Hz
- High-power 350-watt amplifier
- Easy disconnect power and audio terminals
- Removeable feet with built-in Velcro hook pads to securely grip carpets
- Designed to perform in down-fire, up-fire or vertical mounting
- Cast aluminum Morel Lotus grille offers superior protection
- Primo SL subwoofer



unleash the music
www.morelhifi.com




PERFORMANCE

Primo SL AE – Active Enclosure



PSL8AE

8" Active Subwoofer Enclosure
350 WRMS

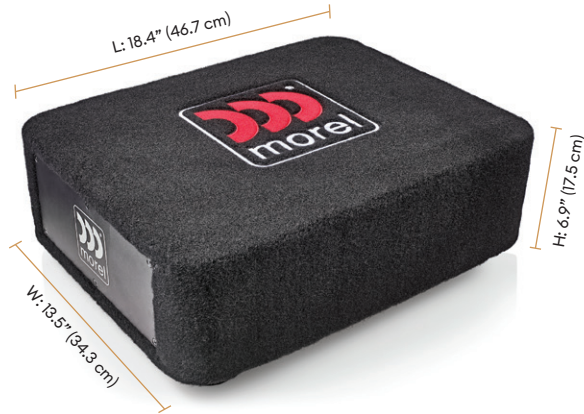

PSL10AE

10" Active Subwoofer Enclosure
350 WRMS

Specifications

	Unit size (inch)	Driver Size	Output Power	Frequency Response	Operating Voltage	Input Sensitivity	Low-Pass Crossover	Bass Boost
PSL8AE	H 6.5" (165mm) x W 12.8" (326mm) x L 16.5" (420mm)	8" (200mm)	350 Watts	20 – 200Hz	10-16 Volts	High: 0.2 - 9 V Low: 0.1 - 4.5V	50-200Hz	0-6dB @ 45Hz
PSL10AE	H 6.5" (165mm) x W 13.3" (338mm) x L 18.1" (460mm)	10" (250mm)	350 Watts	20 – 300Hz	10-16Volts	High: 0.2 - 9 V Low: 0.1 - 4.5V	50-200Hz	0-6dB @ 45Hz

